



Code setting guide for Dogtra ARC1200S FREE PLUS / ARC1202S FREE PLUS




1. Start with the receiver/collar turned off and the transmitter turned on. On the front of the transmitter there is a D1/D2 toggle switch. Set this toggle switch on the “**D1**” position to synchronize the transmitter with the **BLACK** collar/receiver. Set the toggle switch on the “**D2**” position to synchronize the transmitter with the **ORANGE** collar/receiver.



2. Select the intensity level 0 with the intensity selection dial on top of the transmitter.



3. Hold down the On/Off button of the receiver/collar for 5 seconds, until the green LED light on the receiver/collar starts to blink rapidly.

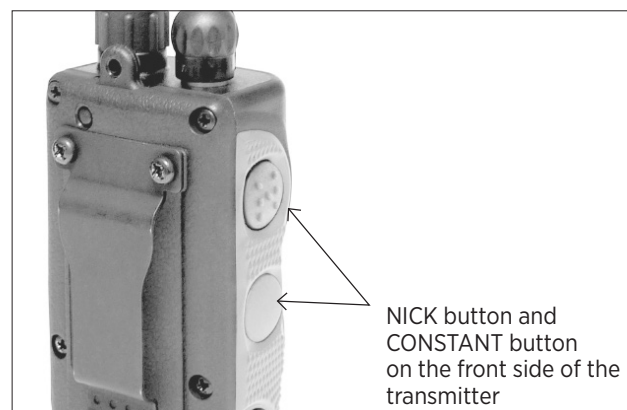

4. Hold the Nick button and the Constant button on the left side of the transmitter simultaneously down for 3 seconds or until the rapid green blink of the LED on the receiver/collar resumes a slower pace. The code setting work is now completed. If you push the Pager button of the transmitter, the receiver/collar will vibrate.