





Dogtra-Europe
12 – 14 Rue Augustin Fresnel
78310 Coignieres, FRANCE
TEL: +33 (0) 130 62 65 65
FAX: +33 (0) 130 62 66 11
E-mail: info@dogtra-europe.com


Code setting guide for Dogtra 3500NCP / 3502NCP

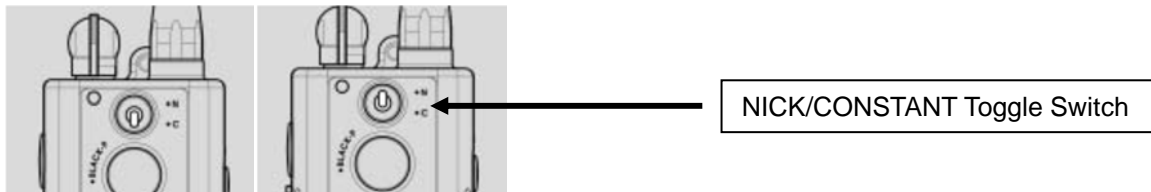


1. Start with the receiver/collar turned off and the transmitter turned on. Set the MILD/REGULAR toggle switch on the back of the transmitter on REGULAR.
On the front of the transmitter there is a NICK/CONSTANT toggle switch. Set this toggle switch on the “**N**” position to synchronize the transmitter with the **BLACK** collar/receiver or on the “**C**” position to synchronize the transmitter with the **ORANGE** collar/receiver.

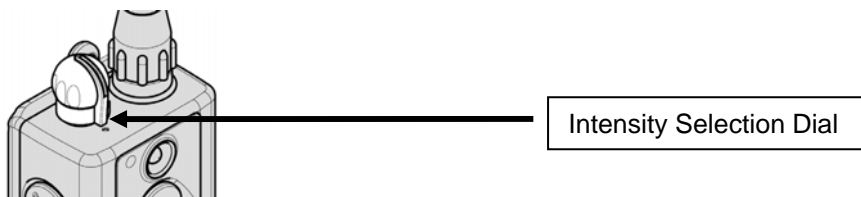

2. Select the intensity level **0** with the intensity selection dial.

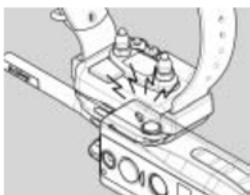

3. Place the red dot on the back of the transmitter against the red dot on the Black or Orange collar/receiver. Hold the two red dots together for several seconds, until the green LED on the receiver/collar starts to blink rapidly, and then separate the two red dots.

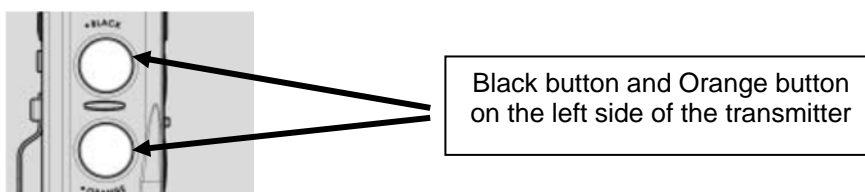

4. Hold the Black button and the Orange button on the left side of the transmitter simultaneously down for 3 seconds or until the rapid green blink of the LED on the receiver/collar resumes a slower pace. The code setting work is now completed.