




Dogtra-Europe


12 – 14 Rue Augustin Fresnel
78310 Coignieres, FRANCE
TEL: +33 (0) 130 62 65 65
FAX: +33 (0) 130 62 66 11
E-mail: info@dogtra-europe.com

Code setting guide for Dogtra RR Deluxe (for bird launchers PL and QL)


Dogtra RR Deluxe uses a technology making it easy to synchronize up to 8 receivers of bird launchers (up to 16 receivers if connection cables are used) with a single transmitter. Once the code setting process has been accomplished, the desired receiver can be activated by selecting the corresponding number with the Selector dial of the transmitter. Please follow the instructions here below to synchronize the transmitter with a new receiver.

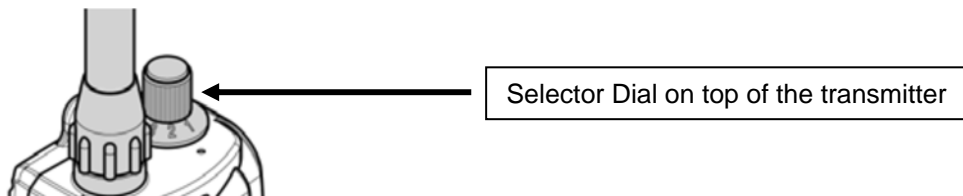

1. Start with the receiver turned off.
By turning the Selector dial on top of the transmitter, choose the number corresponding to the desired receiver.
Example: Select the Number 2 with the Selector dial to synchronize the receiver Number 2.

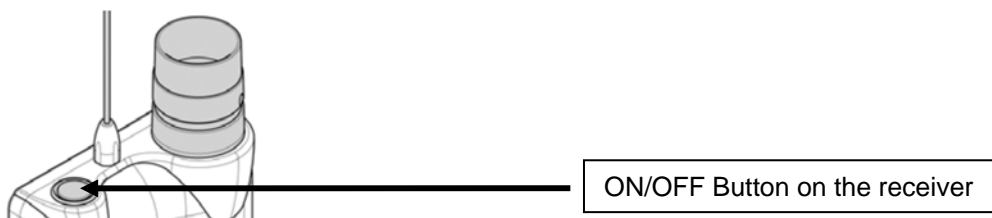

2. Hold the On/Off button on top of the receiver down for several seconds, until the green LED on the receiver starts to blink rapidly, and then release the button.

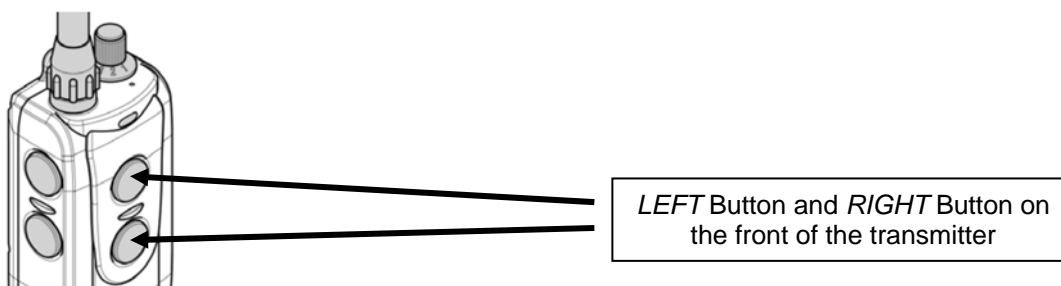

3. Hold the *LEFT* button and the *RIGHT* button on the front of the transmitter simultaneously down for 3 seconds or until the rapid green blink of the LED on the receiver resumes a slower pace. The code setting work is now completed.